



SEC 240KW SERIES

DC Fast Charger




OVERVIEW

SEC 240kW integrated charger is an integrated EV charger providing 240kW DC output with two connectors. Power flexible distributed to two connectors controlled by algorithm realizes intelligently EV charging. It supports high resolution large LCD touch screen with audio function and cable management system which provide better user experience.

DIMENSIONS

W850*D750*2000mm

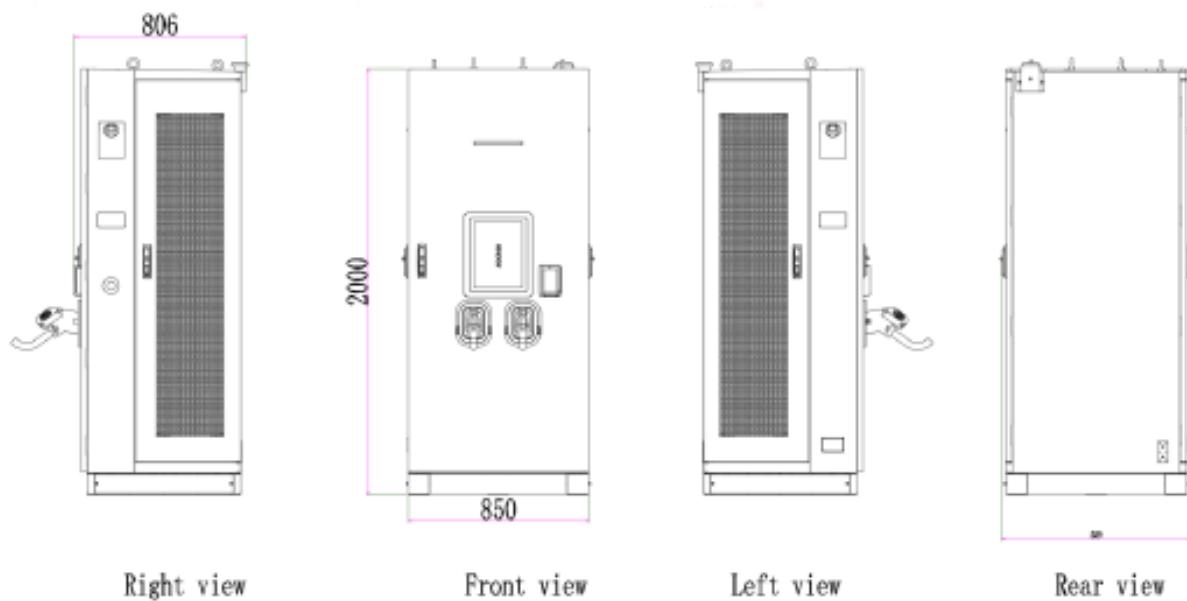

Right view

Front view

Left view

Rear view

SPECIFICATIONS

Input characteristic

240kW Integrated Charger	
Input voltage	400 VAC +/- 10%
Input frequency	50 / 60 Hz
Input type	3P + N + PE
Max Input current	444A
Max Input power	263kVA
Power factor	0.99
THDi	<5%
Grounding type	TN-S, TT
Connector options	CCS2 CCS2+CCS2 CCS2+CHA CHA is optional
Output voltage	CCS2: 200-1000 Vdc CHAdeMO: 200-500 Vdc 300~1000V is the output voltage of constant power output.
Maximum output current	CCS2: 350A CHAdeMO: 125A
Rated power	DC: 240kW
Peak efficiency	96%
Operational altitude	<2000 m
Operating temperature	-25 °C to +65 °C
Temperature derating	Up to 50 °C: 100% output power, 50-65 °C interval, linear power limit, 65 °C or more, module shutdown protection.
Storage temperature range	-30 °C to +70 °C
Humidity	5 %-95 % Rh non-condensing
IP and IK rating	IP55/ IK10
Dimensions	W850mm*D750mm*H2000mm
Weight	≤500 kg
Enclosure material	Stainless steel
Cable length	5m (4.5m exposed from the charger)
Screen	15" HD touchscreen
RFID Reader	ISO 14443 A + B to part 4 and ISO/IEC 15693, Mifare1, NFC
Emergency button	Yes
Communication interface	4G / LAN Port
Language	English (Support customizing other languages)
Communication protocol	OCPP1.6J
Cooling method	Air cooled
Payment method	RFID / APP

Environment

Structure

Components

Others

Standards & certifications

	(Mobile phone / Visa / Master is optional)
EMC	Class A (industrial)
Protection	Undervoltage protection, Overvoltage protection, DC Overcurrent protection, Over-temperature protection, Surge Protection Device, Emergency Stop Protection
Barrier free design	Yes
Optional functions	Cable management, tilt detection, flood detection, smoke detection, heater, cable management
Standards	IEC 61851, IEC 62196, DIN 70121, ISO 15118, etc.
Certifications	CE, TUV

www.suntransenergy.eu

